# SCOTSMAN

AIR, WATER, & REMOTE COOLED MODULAR CONTOUR CUBERS



## **CME806**

#### **VOLUME PRODUCTION • 24 HOUR**

	Certified & rated in accordance with ARI stan- dard 810-95	Air-Cooled		Water-	Cooled	Remote		
		70°/50° lbs./kg.	ARI 90°/70° lbs./kg.	70°/50° lbs./kg.	ARI 90°/70° lbs./kg.	70°/50° lbs./kg.	ARI 90°/70° lbs./kg.	
сме806-32D		770/349	662/300	765/347	725/329	750/340	680/308	

#### Value the Difference of CM<sup>3</sup> Ice Machines:

- CM<sup>3</sup> series offers the lowest lifetime operating costs based on lower water and electrical usage. Combine that with a competitive purchase price and the best warranty in the industry and you have the lowest lifetime ownership cost. Period.
- AutoIQ<sup>TM</sup> Control System monitors and controls the ice machines' functions to ensure consistent ice production and reduce operating costs.
- CM<sup>3</sup> Evaporator is a hot tin dipped, molecularly bonded plate that has been field tested and proven 99.4% reliable over 5 years.
- Rust-free Polyethylene Base and Food Zone is insulated with 1-1/2" of foam which keeps water and food zone cool to reduce operating costs and is backed by a Lifetime Rust-Free Warranty.
- Contemporary styling and stainless steel finish make the CM<sup>3</sup> a perfect addition to any operation.

#### **WARRANTY** *See your dealer for complete warranty details.*

- Limited Lifetime Rust Free Warranty on Food Zone.
- 3 years parts and labor on all components.
- 5 years parts and labor on the CME evaporator.
- 5 years parts on the compressor and condenser.

### **BIN OPTIONS:**



BIN: HTB555



**BIN: BH550** 




**BIN: BH800** 

SCOTSMAN I		Certified & rated in accordance with ARI standard 820-95			
Model Number	Dimensions W"xD"xH"	ARI Bin Capacity	Application Capacity	Finish	Ship Weight lbs./kg.
HTB555	30 x 34.5 x 44.5	420 LBS.	535 LBS.	нтв	110/50
BH550S-C	30 x 31.5 x 44	410 LBS.	520 LBS.	SS	140/64
BH800S*	42 x 31.5 x 44	580 lbs.	740 lbs.	SS	175/79

(HTB) Linear Low Density Polyethylene—Grey color. (SS) Stainless Steel with Polyethylene liner.

\*See Price Schedule For Appropriate Bin Top




APPROX. CUBE SIZE: 13/8" X 13/8" X 5/8" THICK





## Ice Machine Specifications

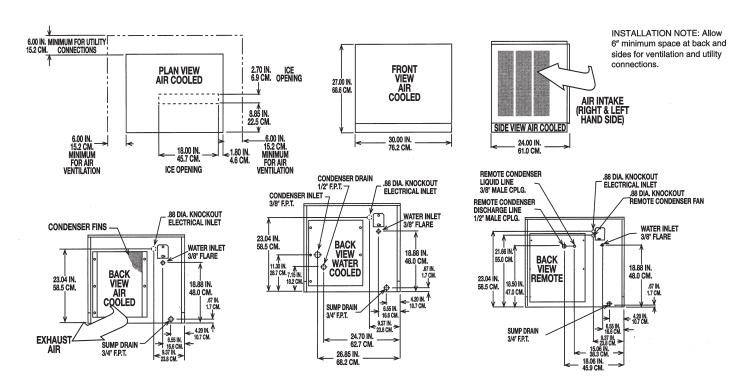

All models: Dimensions: W x D x H Unit: 30" x 24" x 27" Shipping Carton: 331/2" x 28" x 321/2"											
Model Number	Condenser Unit	Basic Electrical Volts/Hz/Phase	Max. Fuse Size or HACR Circuit Breaker	Comp. HP	Circuit Wires	Min. Circuit Ampacity	BTU's per hour	Shipping Weight lbs./kg.	Power Consumption KWH/100 lbs. 90°F/70° F	Water Gallons/ Potable 90°F/70° F	- 1
CME806AS-32D	Air	208-230/60/1	20	21/2	2	17.5	15,400	235/107	6.8	12.9	-
CME806WS-32D	WATER	208-230/60/1	20	21/2	2	16.0	15,400	235/107	5.7	17.6	153
CME806RS-32D	Rемоте	208-230/60/1	30	21/2	2	20.0	15,400	235/107	7.1	16.9	-

All units with Stainless Steel finish.

OPTIONS: Stacking Kit: KSCME6-30

REMOTE CONDENSER—Comes with adjustable legs Dimensions: W x D x H : 24.0" x 44.25" x 29.25" for ERC201 24.0" x 54.25" x 29.25" for ERC402

Model Number	For Use With	Cond. Unit	Finish Basic	Electrical Volts/Hz/ Phase	No. of Wires	Min. Circuit Ampacity	Max Fuse Size or HACR Circuit Braker
ERC201-32A	1-CME806R	Air	Galvanized	208-230/60/1	2	2.6	15
ERC402-32A*	2-CME806R	Air	Galvanized	208-230/60/1	2	2.6	15

\*KCMR-230—Fan Relay Kit: Required to connect two CME806R's to one ERC402-32A PRE-CHARGED REFRIGERANT TUBE KITS: 25-FOOT. RTE25 • 40-Foot. RTE40 • 75-Foot. RTE75 R. Refrigerant: R-404A

Scotsman's ice machines are not designed for outdoor installations. Scotsman remote condensers are designed for outdoor installations.

Machine requires voltage indicated on rating name plate. Failures caused by improper voltage are not considered factory defects. Extended periods of operation at temperatures exceeding limitations constitutes misuse under the terms of Scotsman Manufacturer's Limited Warranty, resulting in a loss of warranty coverage. Specifications and design are subject to change without notice.

**Consult Your Local SCOTSMAN Representative At:** 

#### **IMPORTANT OPERATING REQUIREMENTS:**

	Minimum	Maximum
Air Temperatures	50°F (10°C)	100°F (37.7°C)
Water Temperatures	40°F (4.4°C)	100°F (37.7°C)
Remote Cond. Temps	-20°F (-28.9°C)	120°F (48.9°C)
Water Pressures	20 PSIG	120 PSIG
Electrical Voltage	-5%	+10%

