

Job:	

Item No. _____

DESIGNED FOR HIGHER VOLUME APPLICATIONS

Seven - 4 oz. Servings per Minute per side and 20 Quart Capacity per side

GREAT FOR RESTAURANTS, BUFFETS, & ICE CREAM SHOPS

The **SaniServ** ® model 424 Twin Flavor Soft Serve Freezer can provide not one but two favorite high profit, consistent quality soft serve and yogurt products in a dual barrel design! The ease of the model 424's operation and product versatility is a favorite among owners and operators. The high production, capacity and recovery time insures the 424 is a perfect piece of equipment for satisfying enough of any two customer favorite frozen treats at any time!

NEW SCROLL COMPRESSOR

Provides the **SaniServ** ® Model 424 with quieter operation. It is 20% more efficient. Increased durability, with 50% longer service life.

HEAVY DUTY

Traditional Floor Model Design - SaniServ ® model 424 provides a high volume of two flavors of soft serve and frozen yogurt products in the traditional floor model design.

EASY CLEANING AND OPERATION

Fewer Parts = Simplified Cleaning - SaniServ ® equipment is designed and built with the fewest parts to be disassembled, cleaned and sanitized than any other machine in the industry. The state of the art solid-state AccuFreeze ™ control insures product consistency, worry free operation and customer satisfaction.

HIGH RETURN ON INVESTMENT

Increased Profits – SaniServ ® machines combine efficiency with consistent product quality and fast, quiet operation while insuring customer satisfaction with high profit ice cream or yogurt products.

QUALITY DESIGN

Durability – SaniServ ® machines are built to achieve long and dependable life through simplicity of design. Every machine is shipped standard with a stainless steel exterior, durable steel interior frame construction, heavy-duty components and consistency systems.

Model 424

Floor Model

Twin Soft Serve
Ice Cream / Yogurt Machine
With AccuFreeze ™ Control







We reserve the right to change specifications and product designs without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

MODEL 424

Floor Model Twin Soft Serve/Yogurt Freezer



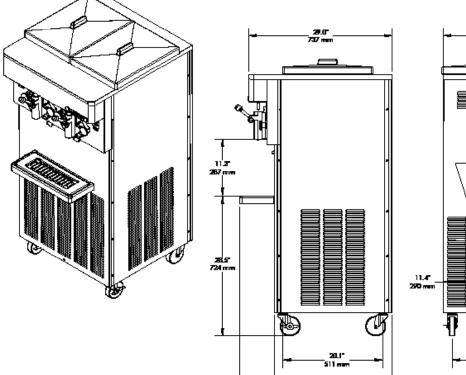

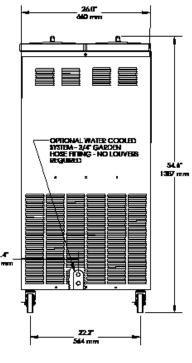

Minimum Wall Clearance Both Sides and Back -6 inches (152 mm)

ELECTRICAL				WIDTH	HEIGHT	DEPTH	WEIGHT	VOLUME
VOLTS	Hz	Ph.	Amps	INCHES (MM)	INCHES (MM)	INCHES (MM)	LBS. (Kg)	CU FT. (cu. m.)
208-230	60	1	2x30*	36 (660)	E4 C (1207)	20 /711)	E7E (061)	
208-230	60	3	2x20*	26 (660)	54.6 (1387)	28 (711)	575 (261)	
Shipping Specifications				37 (940)	60 (1524)	41 (1024)	650 (296)	52.7 (1.49)

23.6

Specifications:

Cooling System:

Air or Water

Dasher and Compressor Motors:

(2) 1 HP Dasher

(2) 2 HP Scroll Compressor

Refrigerant Type:

R404A

Listings:

UL, cUL, NSF

Features:

Evaporator and Mix Reservoir

Capacity:

20 Quarts (18.9 liters)

Dasher:

Heavy-Duty Stainless Steel with low friction scraper blades.

Controls:

AccuFreeze ™ solid-state control for accurate product consistency.

Solid State Audio/Visual Mix Out System with Compressor Lockout

Warranty:

Parts 1 year Compressor 5 years Evaporator 5 years

Options:

Tune Up Kit Parts Tray Syrup Rail

Water Cooled - 3/4" Garden

Hose Fitting

Wash Out Kit - 3/8" Flare Fitting

Export Voltages

^{* 2} circuits required